

All Units come ready to test/PlugNplay !




1/4 Scale P-47 Navigation, Formation and Landing lite setup

One RC channel provides 3 stage steps of lighting with pot or 3 pos. switch :

1. All lights Off at one extreme of the pot or 3 position Tx switch
2. Navigation and Formation lights ON; All are 200k+ mcd LEDs; new this year
3. Above lights and Landing Light ON with separate Tx battery

Warning: Never plug any light into a battery by itself as it will overstress the light

Landing Light is Xenon or Krypton and gets very hot; BEWARE !

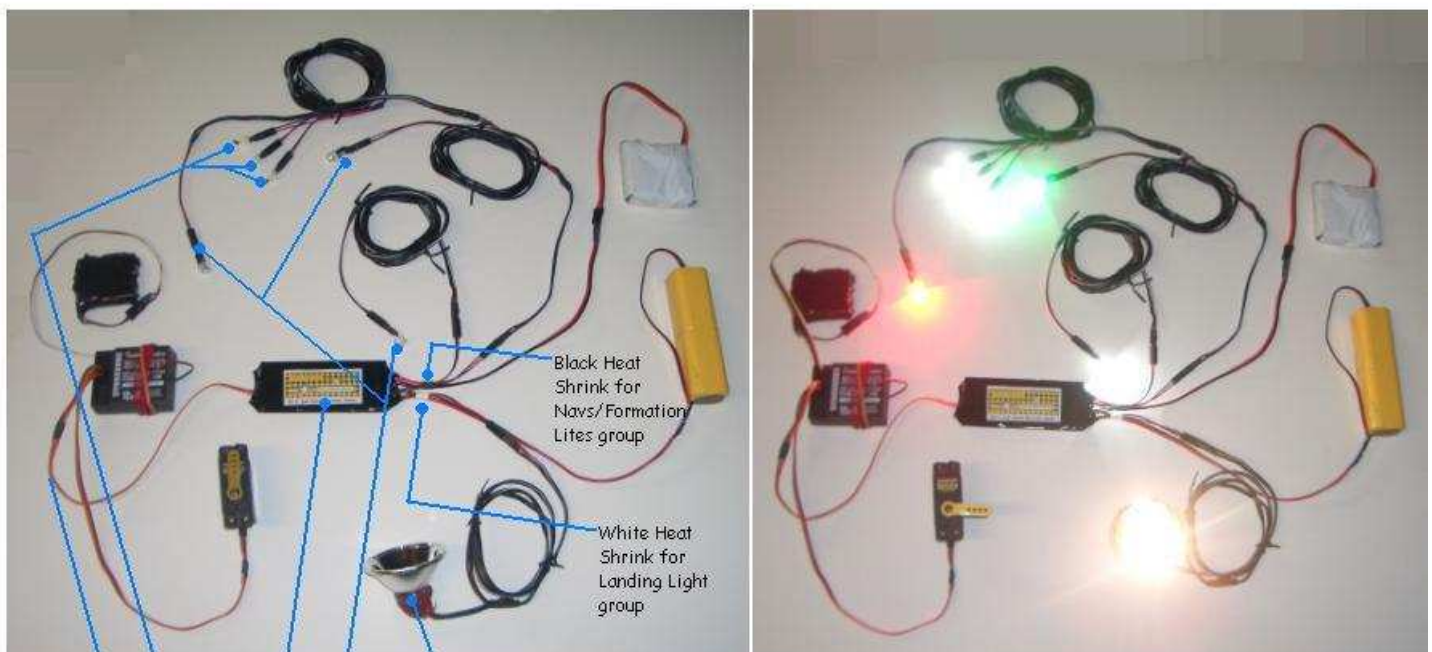

2" Xenon or Krypton Landing Light uses 9v/Tx battery

(3) Navigation LEDs; Red, Green, White; 200K+ mcd at 1 watt, end view

ES-2 Dual channel control unit ; uses 5-cell, 6 volt max. Rx pack for LEDs

(3) Formation LEDs; All white 200K+ mcd at 1 watt, side view

RC channel input control wire with JR color coding

** NO Polarity protection for battery inputs...BE CAREFUL; this type of damage not warrantied


*** NO batteries or Receiver or servo included

**** All lights; LEDs and Landing Light are Polarized, but will tolerate short reverses only



Xeno-Light RC Aircraft Lighting Systems :

Ultra-Brite, Wide-View Red, Green, White 1 Watt LEDs

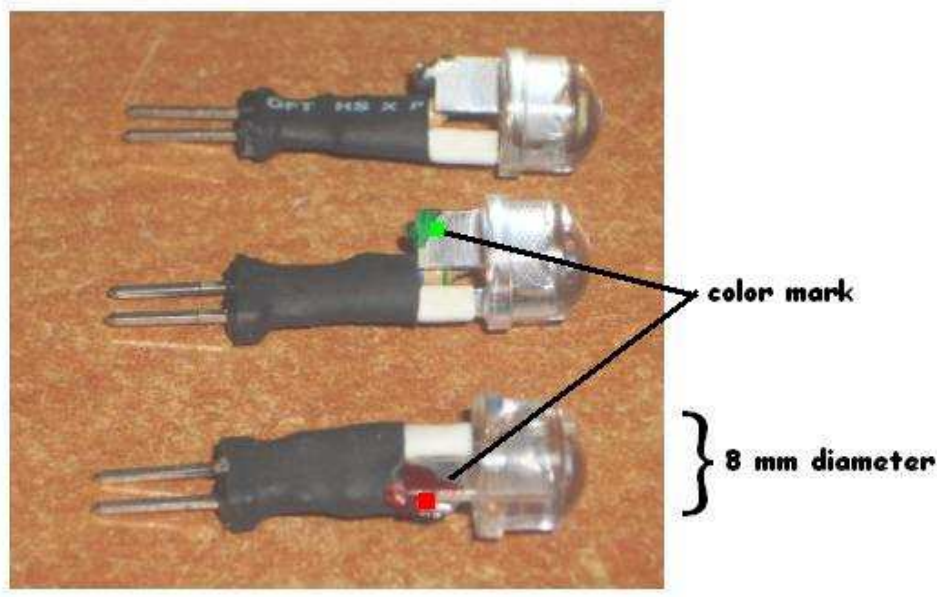

The all new Ultra-Brite/Wide-Angle/Side-View color LEDs, ready for your clear enclosure have arrived and are awaiting your installation to directly replace any of our other lites, especially if heat has been a problem, as with the 6 watt Xenon bulbs, etc.

This lite is barely warm to the touch, but the brightest of any we sell, representing the latest in high-tech advances, unlike some light systems that require a separate, expensive pc board to operate.

The only cautionary notes are that LEDs have a polarity, but no damage results if you install it backwards for a short time, and the short-leads should not be bent very much, as we have tried to make this unit basically the same size as our other lites.

CALL OR EMAIL FOR PRICING

NEW "LED" SUPER BRIGHT BULBS!!